

For additional Singtel WiFi 7 Router(s)

(If you're setting up a WiFi Mesh Network)


Method 1 – Pair using an Ethernet cable

- 1. Confirm the LED on the main router (the router connected to the ONT/ONR) is solid green.
- 2. Set up the additional router next to the main router for pairing and wait until the LED flashes blue.
- 3. Connect an Ethernet cable from any LAN port on the main router to the WAN port on the additional router. Wait for both LEDs to turn green, indicating a successful pairing.
- 4. Once pairing is successful, reposition the additional router to the area where you need better WiFi coverage.


Method 2 – Pair wirelessly using WPS

- 1. Confirm the LED on the main router (the router connected to the ONT/ONR) is solid green.
- 2. Place the additional router near the main router for pairing and wait until the LED flashes blue.
- 3. Press and hold the WPS button on the main router for around 5 seconds, then do the same on the additional router.
- 4. Both LEDs will flash blue rapidly to indicate that pairing is in progress. Wait at least 5 minutes. Once pairing is complete, both LEDs will turn green.


What’s in the box

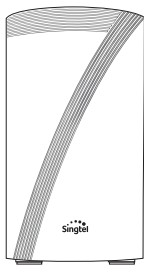


Router x 1

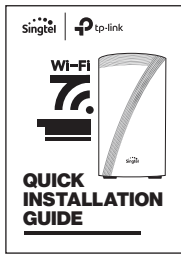

Quick Installation Guide x 1



Power Cable x 1



Ethernet (LAN) Cable x1

Overview



- WPS Button
- Reset Button
- 2.5G LAN Ports
- 10G LAN Port
- 10G WAN/LAN Port
- SFP+
- USB 3.0 Port
- Power



LED Colour	Device Status
Flashing yellow	Starting up or resetting
Yellow	Connection quality is normal
Flashing blue	Ready for setup
Fast flashing blue	Establishing a WPS or mesh connection
Blue	Device is set up but internet unavailable
Flashing green	Firmware is upgrading
Green	Device is set up and connected
Flashing red	Lost connection



WiFi 7 Router
HB813-SGST
Powered by TP-Link



QUICK
INSTALLATION
GUIDE


Your quick & easy step-by-step guide.

Installing the Router (i)


There are 2 possible setups for Singtel Fibre.

Please check your equipment type to confirm the setup.

Optical Network Terminal (ONT)

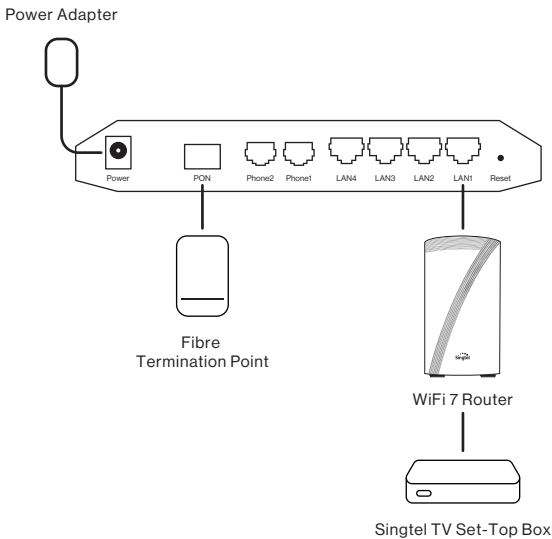

Optional Network Router (ONR)

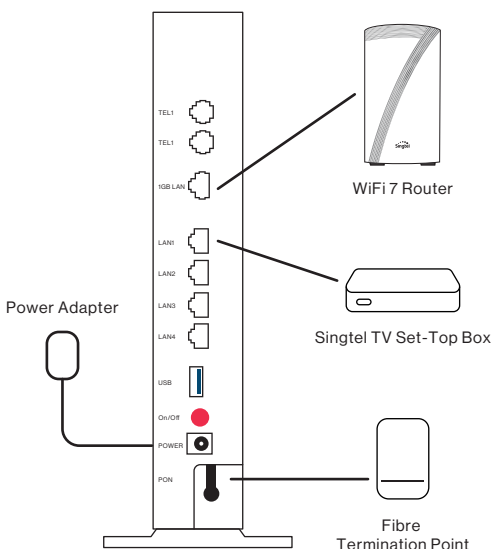

Installing the Router (ii)

1. Insert the power adapter into the WiFi router's power port, then plug it into a power outlet.
2. Connect one end of the Ethernet cable to the LAN 1 port or 10G LAN port on your ONT/ONR (depending on your device), and the other end to the WAN port of your router.
3. Switch the router on. It may take up to 5 minutes to connect. Avoid tampering with the router during the set up.
4. Once connected, the LED will turn solid green. The router is now ready for use via WiFi or an Ethernet connection.

Default WiFi username and password are printed on the device label found on the bottom of the router.

Optimal placement

1. The router should be placed in a central, unobstructed location.
2. For optimal WiFi coverage and to eliminate dead spots, consider adding additional Singtel WiFi 7 Routers.

Speak to a Singtel representative to learn more.

Device safety

1. Keep the router away from heat sources and dusty or wet environments.
2. Do not plug a phone jack connector into the Ethernet port. This may damage the router.

Troubleshooting steps

(If you encounter connectivity issues)

1. Turn your device's WiFi off, then back on, to reset the connection.
2. If the issue persists, reboot the router.
3. To factory reset, press and hold the reset button on the bottom of the router for at least 5 seconds, then release. The router will be restored to its factory default settings.

For more information, visit singtel.com/routers-support or scan the QR code.

